



SPECIFICATIONS

Rated Current:3.0AMP
 Contact Resistance:20mΩ Max
 Withstand Voltage:1000V AC/DC
 Insulation Resistance:1000MΩ Min
 Operation Temperature:-40°c to +105°c
 Contact Material:Brass
 Contact Plating:Au or Sn Over Ni
 Insulator Material:Polyester(UL94V-0)
 Standard: PA6T
 Max.Processing Temp: 230°C for 30-60 seconds
 (260°C for 10 seconds)

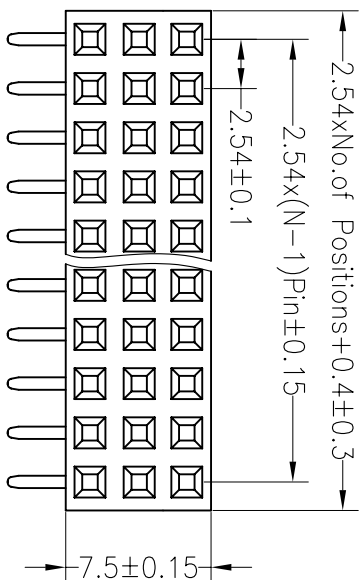



Recommended P.C.B Layout(Top Side)
 (PCB BOARD TOLERANCE±0.05)

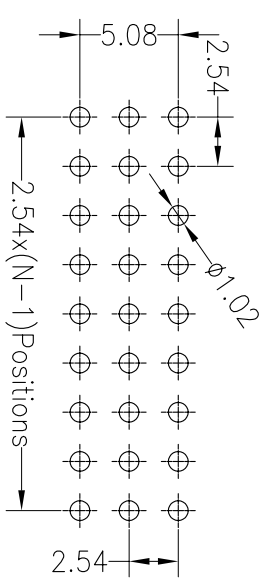

Ordering Information

2285 03 XX X N XX R Y X 01

No. of Pins Per Row: 3*40
 Insulator Material Option:
 A=BK-PBT
 B=BK-PA66
 C=BK-PA6T
 D=BK-PA46
 F=BK-LCP
 Contact Plating:
 G0:Gold Flash
 G2:5U" Gold
 G3:10U" Gold
 G4:15U" Gold
 G5:30U" Gold
 S0:Gold Flash/Tin
 SN:Tin
 Packing:
 O=PE Bag
 A=Troy
 T=Tube
 P=Tube+Cap

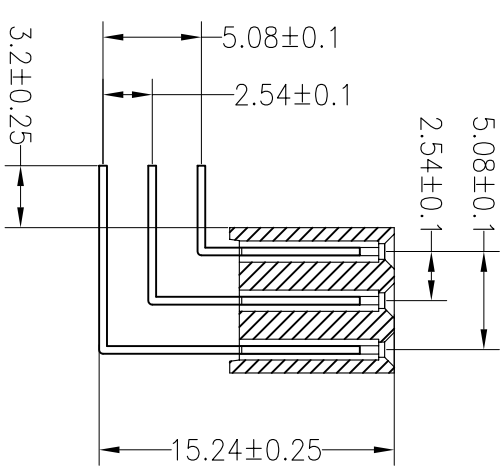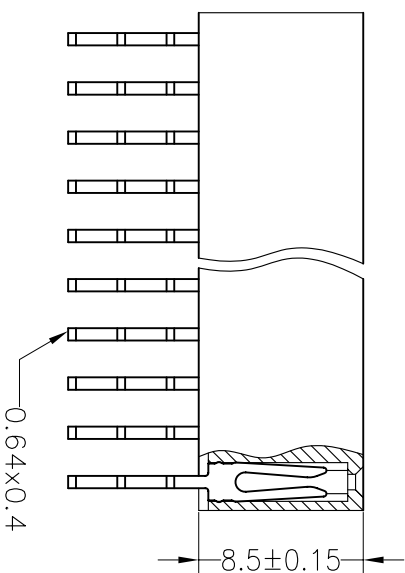

| | | | | | | | | | |
|-----------|-------|-----------|----------|-------|-----|-----|-----|-------------------|--|
| OPERATION | | DRAW | | SCALE | | FIT | | PART NO. | |
| X.X | ±0.30 | Y.YuSheng | 12.03.28 | UNIT | mm | A4 | 1/1 | 228503XXXXXXRYX01 | |
| X.XX | ±0.20 | CHECK | | SIZE | A4 | | | | |
| X.XXX | ±0.10 | | | SHEET | 1/1 | | | | |
| Angle | ±3° | APPROVE | | PROJ. | | | | | |
| DIM | TOL | | | | | | | | |

JIN 深圳市锦凌电子有限公司
 SHENZHEN JINLING ELECTRONIC CO.,LTD
 Tel: 86-755-2997-5806/5802 Fax: 86-755-2997-5992

| | | | | | | | |
|--------------------------|------------|-------------|--|--------|--|--------------------------|--|
| MODIFICATION DESCRIPTION | | CHANGE | | TITLE: | | 2.54PF H8.5mm 3xNpin 90° | |
| REV | DATE | | | | | | |
| A0 | 2012.03.28 | NEW DRAWING | | | | | |
| 1 | | | | | | | |