







**SPECIFICATIONS**

Rated Current: 3.0AMP  
 Contact Resistance: 20mΩ Max  
 Withstand Voltage: 1000V AC/DC  
 Insulation Resistance: 1000MΩ Min  
 Operation Temperature: -40°C to +105°C  
 Contact Material: Brass  
 Contact Plating: Au or Sn Over Ni  
 Insulator Material: Polyester (UL94V-0)  
 Standard: PBT  
 Max. Processing Temp: 180°C for 30-60 seconds  
 (200°C for 10 seconds)

# Ordering Information

2211 01 XX X N XX S Y X 01

No. of Pins Per Row: 1\*40  
 Insulator Material Option:  
 A=BK-PBT  
 C=BK-PA6T  
 E=BK-PA9T  
 F=BK-LCP  
 Contact Plating:  
 G1: Gold Flash  
 G2: 1.5U" Gold  
 G3: 2U" Gold  
 G4: 3U" Gold  
 G5: 5U" Gold  
 S0: Gold Flash/Tin  
 SN: Tin  
 Packing:  
 A=Tray  
 T=Tube

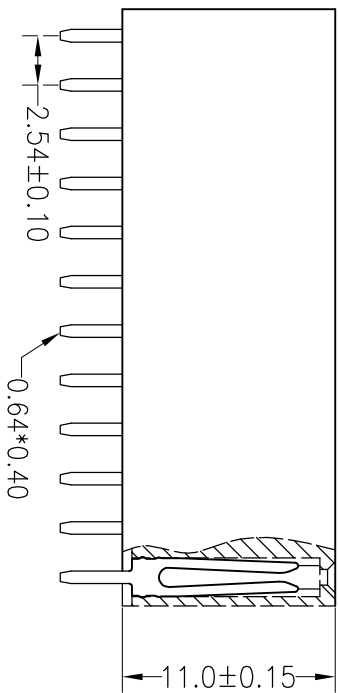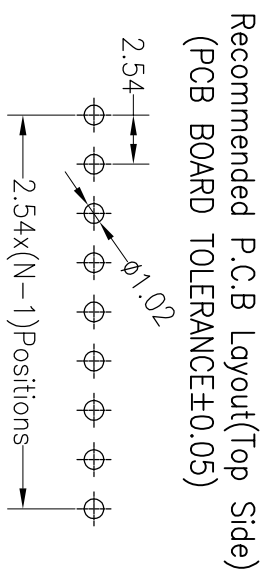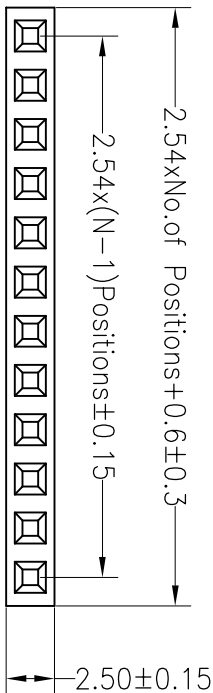

A		B		C		D		E		F		G	
REV	DATE	MODIFICATION DESCRIPTION		CHANGE	DIM	TOL	APPROVE	PROJ.	TITLE:	PART NO.		221101XXXXXXSYX01	
1	2014.05.14	NEW DRAWING			X.XX	±0.30	DRAW			SCALE		FIT	
					X.XX	±0.20	CHECK			UNIT		mm	
					X.XXX	±0.10				SIZE		A4	
					Angle	±3°				SHEET		1/1	
										PROJ.		1/1	
										PART NO.		221101XXXXXXSYX01	
										TITLE:		2.54PF H11.0mm 1xNpin 180°	
										深圳市锦凌电子有限公司 SHENZHEN JINLING ELECTRONIC CO.,LTD Tel: 86-755-2997-5806/5802 Fax: 86-755-2997-5992			